

# Models

Models	Sketch	Weight	Suggested Width	Rolled Blind	
SUPER REINFORCED		6,50 Kg/m <sup>2</sup>	Max. Up to 2,50 m.	Height 1,30 m 1,50 m 2,30 m	Diameter 0,19 m 0,21 m 0,25 m
REINFORCED 19		5,00 Kg/m <sup>2</sup>	Up to 2,00 m.	Height 1,30 m 1,50 m 2,30 m	Diameter 0,18 m 0,20 m 0,24 m
REINFORCED 17		3,60 Kg/m <sup>2</sup>	Up to 1,50 m.	Height 1,30 m 1,50 m 2,30 m	Diameter 0,18 m 0,20 m 0,23 m
STANDARD 20		3,50 Kg/m <sup>2</sup>	Up to 1,50 m.	Height 1,30 m 1,50 m 2,30 m	Diameter 0,20 m 0,22 m 0,27 m
PICCOLA		3,80 Kg/m <sup>2</sup>	Up to 1,00 m.	Height 1,30 m 1,50 m 2,30 m	Diameter 0,15 m 0,16 m 0,19 m

Epsilon@edjgar.com.ar

**IMPORTANT:** Should indicated measure be surpassed and in accordance with the chosen model, it is suggested to place steel strips within the rods, as reinforcement, and proportionally to blind height and width.  
Moreover, please pay special attention to the rod model you choose, window location features in high buildings or towers as compared to the height and exposure to front areas opened to window action and sun exposure.

**INTEGRAL PROCESS:** Our profiles are Polyvinyl Chloride (PVC) Raw Resin-manufactured SOLVIN by SOLVAY. Later on, such a resin is utilized for producing the compound in its different colors and with all its chemically balanced components throughout an integral process, thus assuring product quality since the beginning.

**ISO 9001:2000 QUALITY STANDARD:** The design, production and marketing of our products meet ISO 9001:2000 Standard as accredited by DQS and IQNet.


### ADVISORY SERVICES - NON-CHARGED BUDGETS - INSTALLATION - REPARATIONS

We sell loose rods with tailored cuts immediately made. We also sell all fittings and special mechanisms necessary for blind operation, nervured plate shaft, pulley, bolt, clamp, roller, belts and tapes.  
We also have reducing pulleys, stabilizing pulleys, tubular electric and conventional engines, special, reinforced and zinc-made rollers, turning clamps, etc.

## BLIND COLORS:

Color	Models
White	All models
Gray	Reinforced # 19 / Super
Beige	Reinforced # 19 / Super
Wooden	Super

## How to Take Measures:

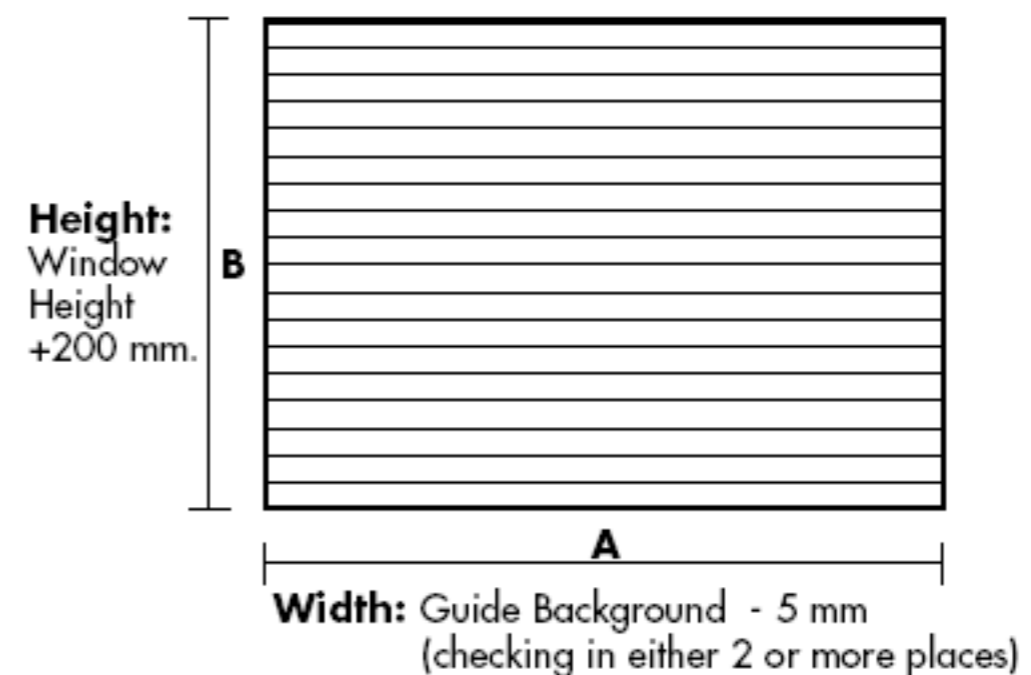

ISO 9001 - Gestión de Calidad



Certificado N° BR028-110987-3

A Product Manufactured By



**Sales**

Alvarez Jonte 2656 - Capital Federal  
C1416EXY - República Argentina  
Tel./Fax: (54-11) 4582-3737  
[info@steelplastic.com.ar](mailto:info@steelplastic.com.ar)

**Manufacturing Plant and Administration**  
Descartes 3551 - Parque Industrial Tortuguitas  
B1667AYC - Provincia de Bs.As. - Rep. Argentina

[www.steelplastic.com.ar](http://www.steelplastic.com.ar)

Information contained in this datasheet is subject to modifications and/or amendments without any previous notice.